

F50-N18L-A 12N18-3A

Datasheet

FULBAT[®]
MOTORCYCLE BATTERY



DRY



Dry battery range offers an incomparable choice of 6V and 12V models. Delivered with an acid pack, Dry battery must be activated before the first use and must be checked periodically.


Dry construction, no maintenance is necessary during a long period of storage.

SPECIFICATIONS

Voltage	Capacity	CCA (EN)
12V	21.1Ah (20hr) 20.0Ah (10hr)	260 A

DIMENSIONS & WEIGHT

Length	205±2mm
Width	90±2mm
Total Height	162±2mm
Gross weight	6.61kg

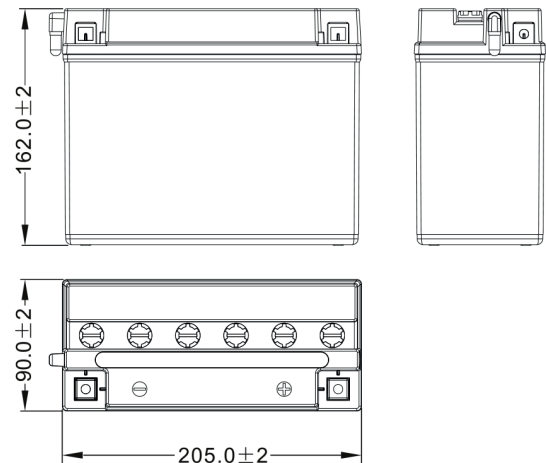


FEATURES

- Dry charged construction
- Activation before first use
- Periodically maintenance and refilled if necessary
- Upright installation only
- 6V and 12V batteries
- Regular life duration
- Unlimited shelf life


POLARITY



MOUNTING ANGLES



TERMINAL

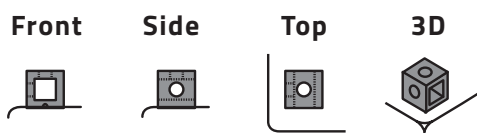

APPLICATIONS

