

FB10L-A2

Datasheet

FULBAT™
MOTORCYCLE BATTERY



DRY



Dry battery range offers an incomparable choice of 6V and 12V models. Delivered with an acid pack, Dry battery must be activated before the first use and must be checked periodically.

Dry construction, no maintenance is necessary during a long period of storage.

SPECIFICATIONS

Voltage

12 V

Capacity

11.6Ah (20hr)

11.0Ah (10hr)

CCA (EN)

130 A

DIMENSIONS & WEIGHT

Length

135±2mm

Width


90±2mm

Total Height

145±2mm

Gross weight

3.59kg

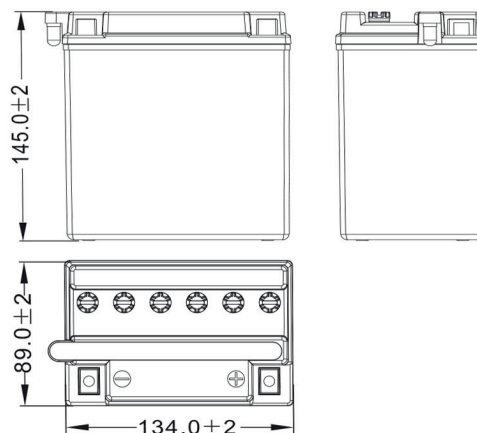


FEATURES

- Dry charged construction
- Activation before first use
- Periodically maintenance and refilled if necessary
- Upright installation only
- 6V and 12V batteries
- Regular life duration
- Unlimited shelf life

POLARITY



MOUNTING ANGLES



TERMINAL

Front



Side



Top



3D



APPLICATIONS



Motorcycle



Scooter