

FTX4L-BS / FTZ5S-BS

Datasheet



MF



The MF battery range is designed to offer more comfort and performance. Maintenance free, the MF battery is delivered with a separate acid pack and needs to be filled and activated before the first use.


Its AGM (Absorbed Glass Mat) design allows it to become sealed once activated and also improves the lifespan and resistance of the battery to harsh conditions.

SPECIFICATIONS

Voltage	Capacity	CCA (EN)
12 V	4.2 Ah (20hr)	50 A
	4.0 Ah (10hr)	

DIMENSIONS & WEIGHT

Length	113±2mm
Width	70±2mm
Total Height	85±2mm
Gross weight	1.43kg

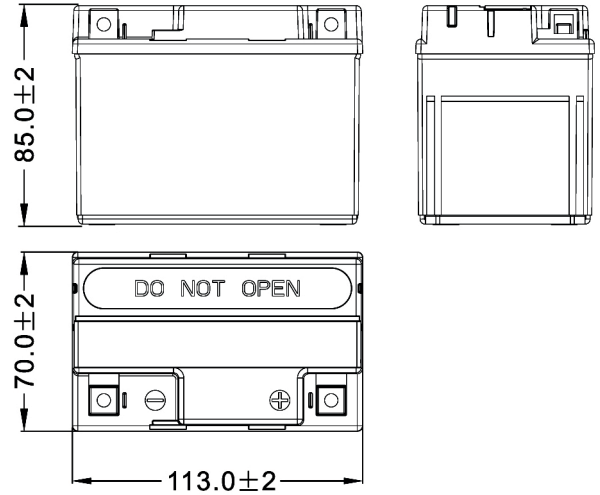


FEATURES

- AGM technology
- Delivered with acid pack
- Need to be filled before first use
- No maintenance once activated
- Higher life cycle
- Upright installation only
- Reduction of plate sulfation
- Suitable for cold weather
- Unlimited shelf life


POLARITY



MOUNTING ANGLES



TERMINAL

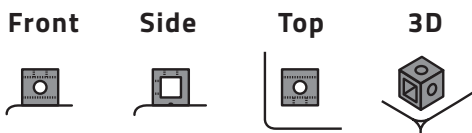

APPLICATIONS

